

Ramps

Purpose:


- ramps for people with disabilities
- ramps for forklift trucks
- overrun of high kerbs

Place of production:

Geyer & Hosaja Sp. z o.o.
Ul. Gorliczyńska 157
37-200 Przeworsk

Material:


Vulcanised rubber
(wear layer)
SBR rubber granulate
PUR resin
Reflective tape 3M
Metal reinforcement for assembly

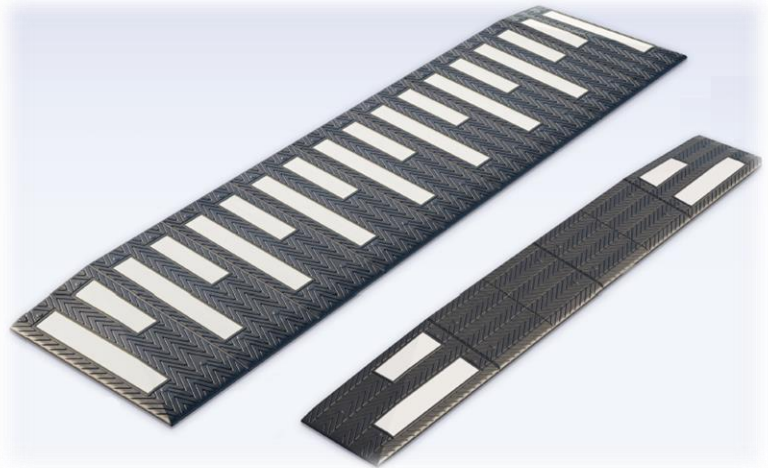

Dimensions, types:


10 cm Model
Max. width of the elements 500mm
Max. length of the elements 1000mm

	CENTRAL ELEMENTS	LEFT-HAND CENTRAL ELEMENTS		RIGHT-HAND CENTRAL ELEMENTS	
MODEL	SPS04	LPS04	LPS44	RPS04	RPS44
HEIGHT (mm)	0-100	0-100	100	0-100	100
WEIGHT (KG)	24,5	24,5	33	24,5	33

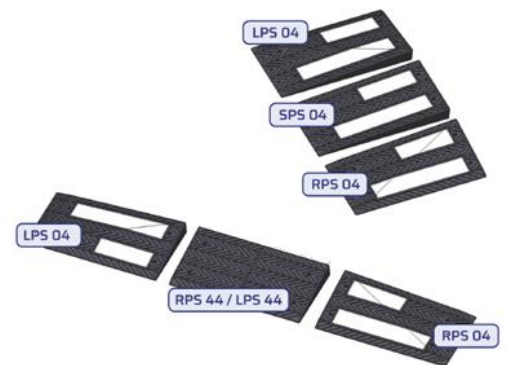

8 cm Model
Max. width of the elements 450mm
Max. length of the elements 1000mm

	CENTRAL ELEMENTS	LEFT-HAND CENTRAL ELEMENTS		RIGHT-HAND CENTRAL ELEMENTS	
MODEL	SPS03	LPS03	LPS33	RPS03	RPS33
HEIGHT (mm)	0-80	0-80	80	0-80	80
WEIGHT (KG)	24,5	24,5	33	24,5	33

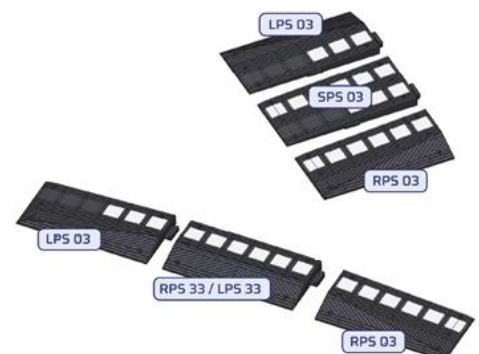

Colour:

black
white/ yellow 3M reflective tape

Technical parameters:

Parameters	Value	Unit	Standard / Method
Tensile strength (wear layer)	≥ 5,0	MPa	PN-ISO 37
Hardness	≥ 60	°ShA	PN-EN ISO 868:2005
Water absorption	≤ 2	%	PN-EN ISO 62
Tolerance - length, width, height	± 2	%	of nominal
Tolerance- weight	± 2	%	of nominal

Packing:

Packed in a cardboard box on a Euro pallet in quantities depending on the order.
Description on the pallet with the name of the product, its quantity, batch number and packing date.
Other packaging is possible on request

Identification:

Product- on the underside of the product information about the date of production.
Pallet- product name, quantity, pallet identification number, packing date, quality control stamp.

Storage:

The products should be stored on pallets in protective film and protected from external weather conditions.

The products may be stored for a longer period of time only in closed, ventilated rooms without humidity, after removing the protective film. Storage temperature: max 40 °C

Health, safety and fire conditions:

Conditions for storage and use of the product- must meet all requirements for storage and use of rubber materials.