

Linear speed bumps

D7
D5 Standard / Eco / Premium
M5
M3

Purpose:

- traffic calming on urban roads, car parks

Place of production:

Geyer & Hosaja Sp. z o. o.
 Partynia 12
 39-310 Radomyśl Wielki

Material:

Vulcanised rubber
 Reflective tape 3M
 Metal reinforcement for mounting

**Dimensions:**

| Item name | | Length (mm) | Width (mm) | Height (mm) | Weight (kg) |
|--------------------|----------------|----------------|---------------|----------------|----------------|
| D7 | (centre piece) | 940 | 495 | 71 | 23 |
| | (end piece) | 940 | 445 | 71 | 15 |
| D5 Standard | (centre piece) | 895 | 495 | 52 | 16 |
| | (end piece) | 895 | 435 | 52 | 9,5 |
| D5 Eco | (centre piece) | 895 | 495 | 50 | 18,5 |
| | (end piece) | 895 | 435 | 50 | 11 |
| D5 Premium | (centre piece) | 895 | 495 | 50 | 18,5 |
| | (end piece) | 895 | 435 | 50 | 11 |
| M5 | (centre piece) | 645 | 500 | 52 | 12 |
| | (end piece) | 645 | 300 | 52 | 6 |
| M3 | (centre piece) | 600 | 500 | 27 | 8,2 |
| | (end piece) | 600 | 300 | 27 | 5,4 |


Kolory:

Black, yellow
 Reflective element "cat's eyes" (D5 Premium)
 Reflective tape 3M


Technical parameters:

| Parameters | Value | Unit | Standard / Method |
|---------------------------|-------|------|--------------------|
| Tensile strength | ≥ 4,0 | MPa | PN-ISO 37 |
| Hardness | ≥ 60 | °ShA | PN-EN ISO 868:2005 |
| Water absorption | ≤ 2 | % | PN-EN ISO 62 |
| Tolerance - length, width | ± 2 | % | of nominal |
| Tolerance - height | ± 2 | % | of nominal |
| Tolerance- weight | ± 2 | % | of nominal |


Technical drawings:

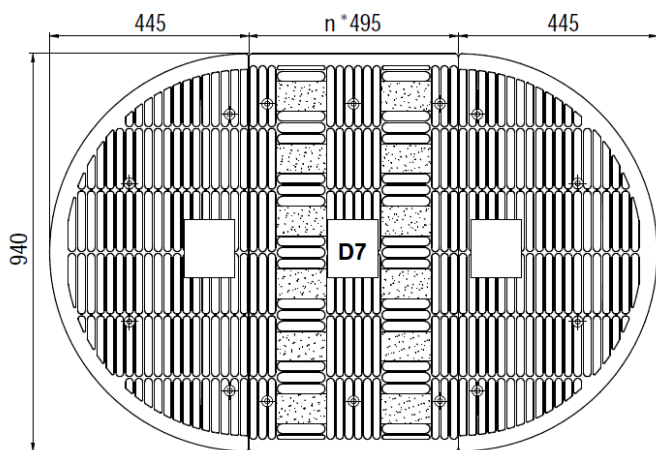


Linear speed bump D7

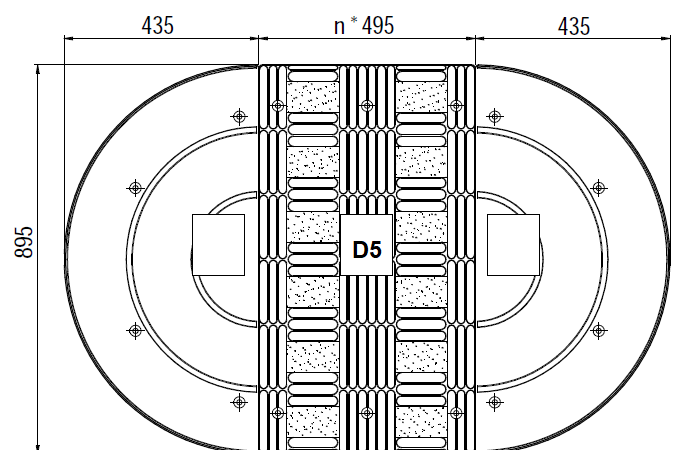


Linear speed bump D5

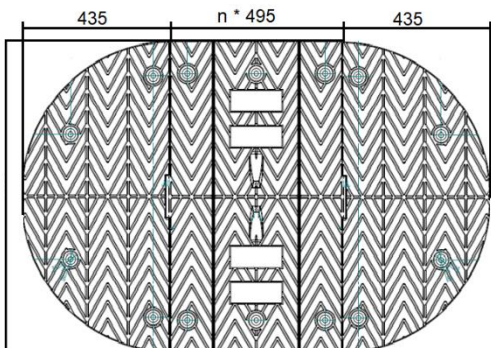

Linear speed bump
D5 Eco/ Premium

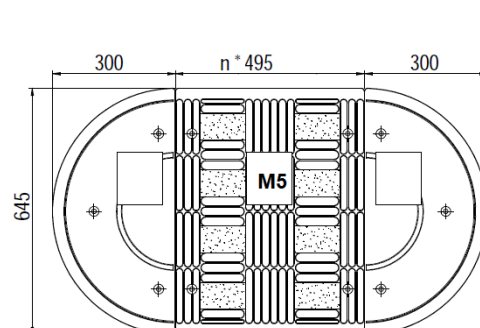

Linear speed bump M5

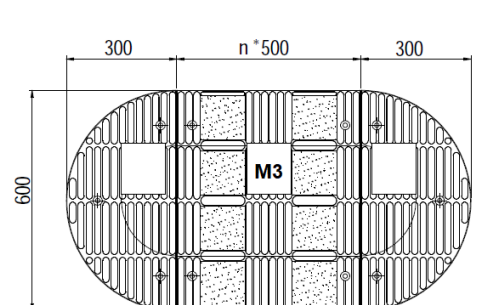

Linear speed bump M3

Packing:

The method of packaging is determined individually, depending on the order.

Description with product name, quantity, batch number and packing date on the pallet.

Identification:

Product- on the underside of the product information about the date of production.

Pallet- product name, quantity, pallet identification number, packing date, quality control stamp.

Storage:

The products should be stored on pallets in protective film and protected from external weather conditions.

The products may be stored for a longer period of time only in closed, ventilated rooms without humidity, after removing the protective film. Storage temperature: max 40 °C

Health, safety and fire conditions:

Conditions for storage and use of the product- must meet all requirements for storage and use of rubber materials.