

Hol Separator 70/ 120**Purpose:**

- separation of cycling routes,
- separating tram tracks from roadways
- separation of parking spaces

Place of production:

Geyer & Hosaja Sp. z o. o.
Partynia 12
39-310 Radomyśl Wielki

Material:

Vulcanised rubber
3M reflective tape
Metal reinforcements for mounting

**Dimensions:**

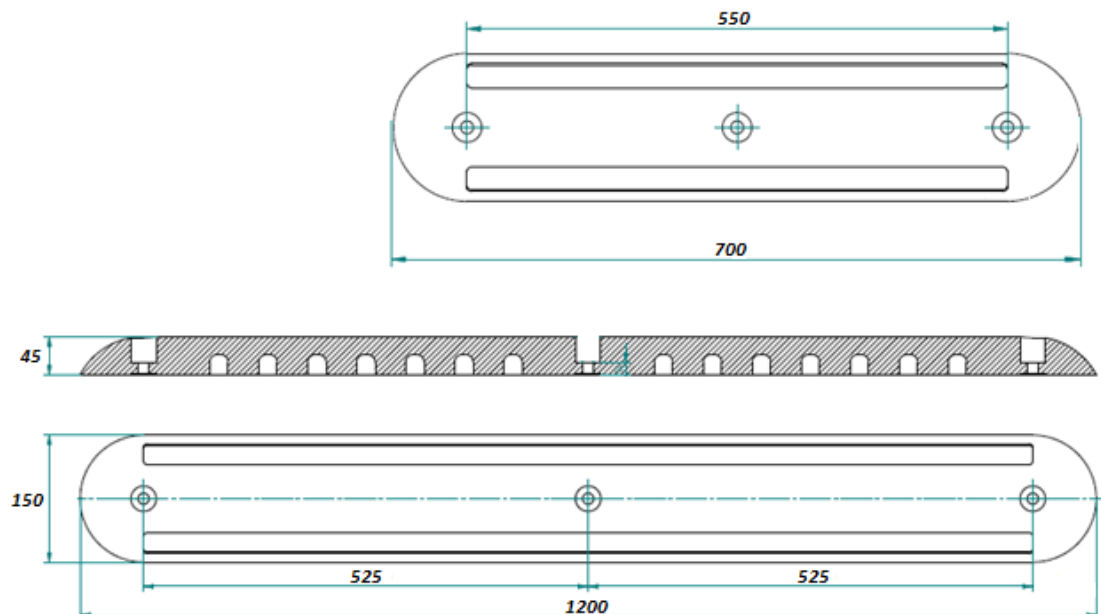
Item name	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
Hol separator 70	700	150	45	4,6
Hol separator 120	1200	150	45	6,2

Colour:

black, red (other colours on request)
white/ yellow 3M reflective tape

Technical parameters:

Parameters	Value	Unit	Standard / Method
Tensile strength	≥ 4,0	MPa	PN-ISO 37
Hardness	≥ 60	°ShA	PN-EN ISO 868:2005
Water absorption	≤ 2	%	PN-EN ISO 62
Tolerance - length, width	± 2	%	of nominal
Tolerance - height	± 2	%	of nominal
Tolerance- weight	± 2	%	of nominal

Technical drawings:**Packing:**

The products are packed in a cardboard box on a euro-pallet in quantities depending on the type of product.

Hol separator 70- 200 pcs, Hol separator 120- 150 pcs.

Description with the product name, quantity, batch number and packing date on the pallet.

Other packaging is possible on request

Identification:

Product- on the underside of the product information about the date of production.

Pallet- product name, quantity, pallet identification number, packing date, quality control stamp.

Storage:

The products should be stored on pallets in protective film and protected from external weather conditions.

The products may be stored for a longer period of time only in closed, ventilated rooms without humidity, after removing the protective film. Storage temperature: max 40 °C

Health, safety and fire conditions:

Conditions for storage and use of the product- must meet all requirements for storage and use of rubber materials.