

## Chain separator

**Purpose:**

- cordoning off road surfaces,
- marking of traffic narrowings,
- kerb function,
- marking of lanes,
- organisation of islands and roundabouts

**Place of production:**

Geyer & Hosaja Sp. z o. o.  
Ul. Gorliczyńska 157  
37-200 Przeworsk

**Material:**

SBR rubber granulate  
PUR resin (colourless/coloured)

**Dimensions:**

length            600 mm  
width             160 mm  
height            160 mm

**Weight:**

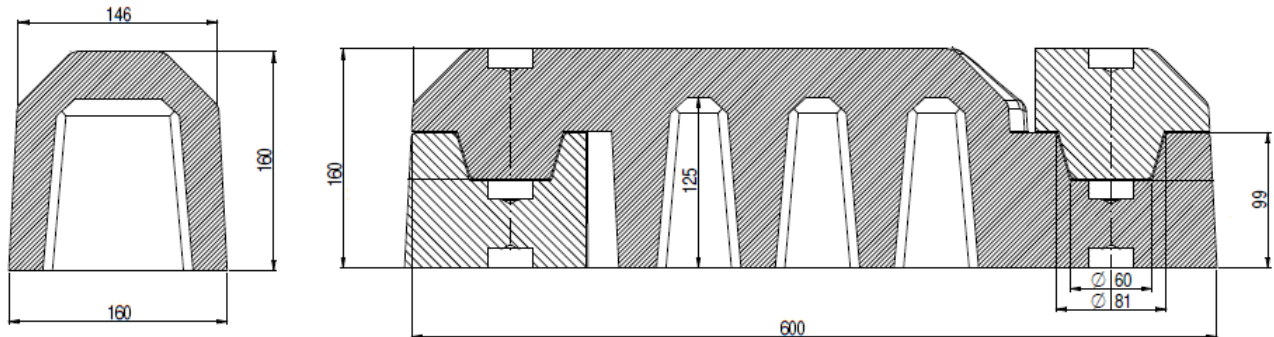
11,0 kg

**Colour:**

black/ yellow/ red/ white

**Technical parameters:**

Parameters	Value	Unit	Standard / Method
Tensile strength	≥ 1,0	MPa	PN-ISO 37
Hardness	≥ 55	°ShA	PN-EN ISO 868:2005
Tolerance - length, width	± 2	%	of nominal
Tolerance - height	± 2	%	of nominal
Tolerance- weight	± 2	%	of nominal

**Technical drawings:****Packing:**

Packed on a Euro pallet in quantities of 40 pieces.

Description on the pallet with the name of product, quantity, batch number and packing date.

Other packaging is possible on request

**Identification:**

Product- on the underside of the product information about the date of production.

Pallet- product name, quantity, pallet identification number, packing date, quality control stamp.

**Storage:**

The products should be stored on pallets in protective film and protected from external weather conditions.

The products may be stored for a longer period of time only in closed, ventilated rooms without humidity, after removing the protective film. Storage temperature: max 40 °C

**Health, safety and fire conditions:**

Conditions for storage and use of the product- must meet all requirements for storage and use of rubber materials.