

Asylum segments „Consul 50”**Purpose:**

- separation of lanes
- Securing off-street areas, junctions and pedestrian crossings
- Separation of cycle lanes
- chicanes before entering towns

Place of production:

Geyer & Hosaja Sp. z o.o.
Ul. Gorliczyńska 157
37-200 Przeworsk

Material:

SBR rubber granulate
PUR resin
Metal reinforcement for assembly
Reflective element - micro beads
Optional 3M white reflective tape

**Dimensions:**

Item name	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
1. ZAN 50	500	500	100	20,0
2. ZAS 50	500	500	100	22,0
3. ZAW 50	500	500	100	23,5

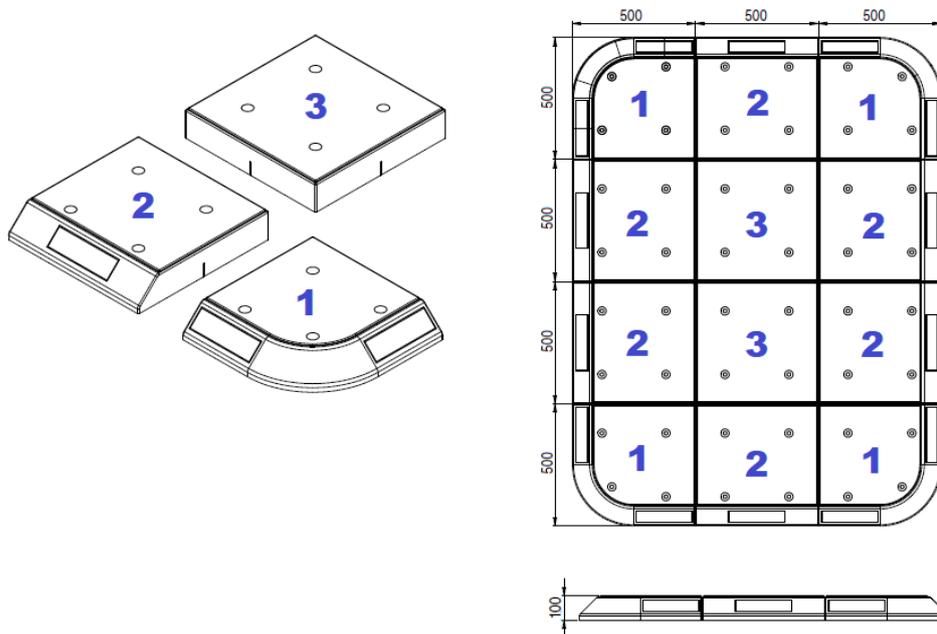
Option available to order a personalised solution according to customer design.

Colour:

Red/ grey
Edging painted with glass microspheres

Technical parameters:

Parameters	Value	Unit	Standard / Method
Tensile strength	≥ 1,0	MPa	PN-ISO 37
Hardness	≥ 55	°ShA	PN-EN ISO 868:2005
Water absorption	≤ 2	%	PN-EN ISO 62
Tolerance - length, width	± 2	%	of nominal
Tolerance - height	± 2	%	of nominal
Tolerance- weight	± 2	%	of nominal

Technical drawings:**Packing:**

Packed on a Euro pallet. Protected by protective film and strapped with tape.

Description on the pallet with the name of the product, its quantity, batch number and packing date.

On customer's request other way of packing possible

Identification:

Product- on the underside of the product information about the date of production.

Pallet- product name, quantity, pallet identification number, packing date, quality control stamp.

Storage:

The products should be stored on pallets in protective film and protected from external weather conditions.

The products may be stored for a longer period of time only in closed, ventilated rooms without humidity, after removing the protective film. Storage temperature: max 40 °C

Health, safety and fire conditions:

Conditions for storage and use of the product- must meet all requirements for storage and use of rubber materials.