

## Modular speed ramp 8 cm

**Purpose:**


- slowing down in the lane area

**Place of production:**

Geyer & Hosaja Sp. z o. o.  
Ul. Gorliczyńska 157  
37-200 Przeworsk

**Material:**

Vulcanised rubber  
(wear layer)  
SBR rubber granulate  
PUR resin  
Reflective tape 3M  
Metal reinforcement for assembly

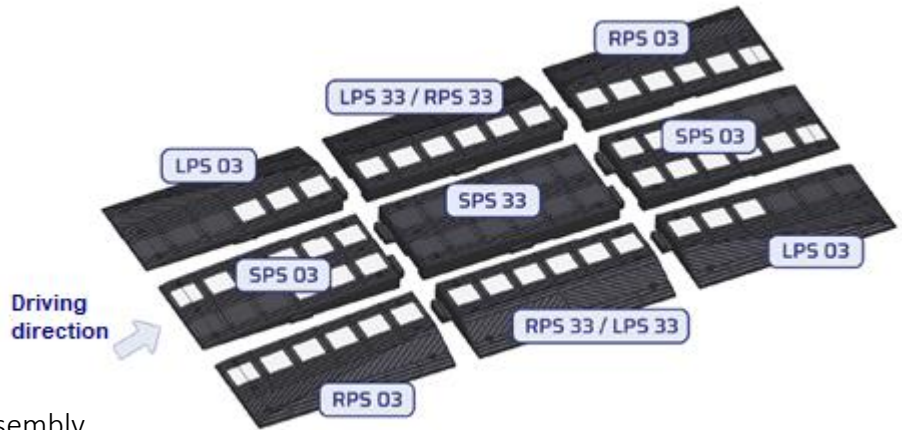

**Dimensions:**

Item name	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
1. SPS 03	1000	450	0-80	24,5 ±0,5
2. SPS 33	1000	450	80	34 ±0,5
3. LPS 03	1000	450	0-80	22,5 ±0,5
4. LPS 33	1000	450	0-80	28,5 ±0,5
5. RPS 03	1000	450	0-80	22,5 ±0,5
6. RPS 33	1000	450	0-80	28,5 ±0,5


**Colour:**

black  
white/ yellow 3M reflective tape

**Technical parameters:**

Parameters	Value	Unit	Standard / Method
Tensile strength (wear layer)	≥ 5,0	MPa	PN-ISO 37
Hardness	≥ 60	°ShA	PN-EN ISO 868:2005
Water absorption	≤ 2	%	PN-EN ISO 62
Tolerance - length, width, height	± 2	%	of nominal
Tolerance- weight	± 2	%	of nominal

Technical drawings:

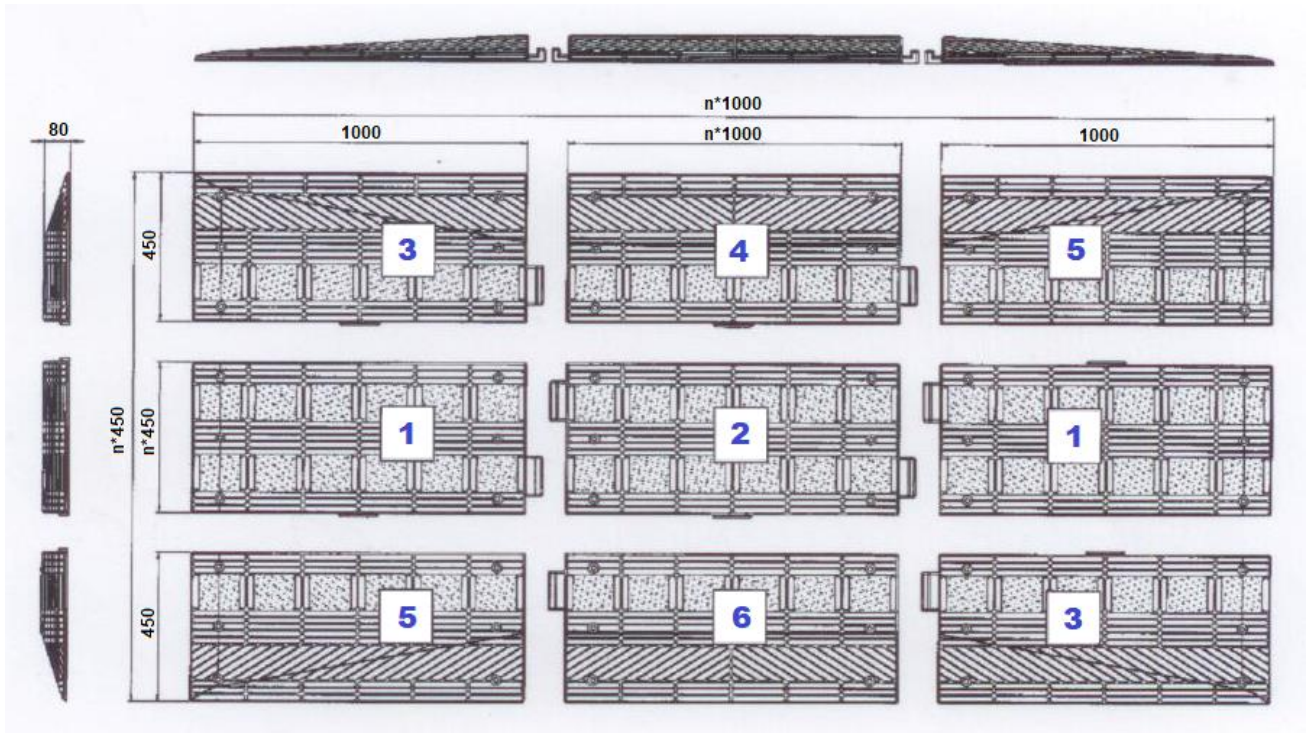

**Packing:**

Packed in a cardboard box on a Euro pallet in quantities depending on the order.

Description on the pallet with the name of the product, its quantity, batch number and packing date.

Other packaging is possible on request

**Identification:**

Product- on the underside of the product information about the date of production.

Pallet- product name, quantity, pallet identification number, packing date, quality control stamp.

**Storage:**

The products should be stored on pallets in protective film and protected from external weather conditions.

The products may be stored for a longer period of time only in closed, ventilated rooms without humidity, after removing the protective film. Storage temperature: max 40 °C

**Health, safety and fire conditions:**

Conditions for storage and use of the product- must meet all requirements for storage and use of rubber materials.

**Installation / Use:**

The product should be installed in accordance with the instructions available on the website <https://youtu.be/2Xbly46Q02U>



In order to ensure effective protection of the vehicle against damage and effective fulfilment of the function of individual elements of the product, it is recommended to drive over the speed ramp at an even speed in accordance with the road traffic regulations. Braking on the speed ramp is prohibited.