

Parking separator 180 / 90 / 55

Purpose:

- optimising the use of parking space in public and private areas

Place of production:

Geyer & Hosaja Sp. z o. o.
Ul. Gorliczyńska 157
37-200 Przeworsk

Material:

SBR rubber granulate (used tire recycling)
PUR resin
Reflective tape 3M
Metal reinforcement for assembly



Dimensions:

Item name	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
Separator 180	1820	152	102	17,0
Separator 90	870	152	102	8,0
Separator 55	550	152	102	5,3


Colour:

black/ green/ blue
white/yellow 3M reflective tape

Technical parameters:

Parameters	Value	Unit	Standard / Method
Tensile strength	≥ 1,0	MPa	PN-ISO 37
Hardness	≥ 55	°ShA	PN-EN ISO 868:2005
Tolerance - length, width	± 2	%	of nominal
Tolerance - height	± 2	%	of nominal
Tolerance- weight	± 2	%	of nominal

Technical drawings:

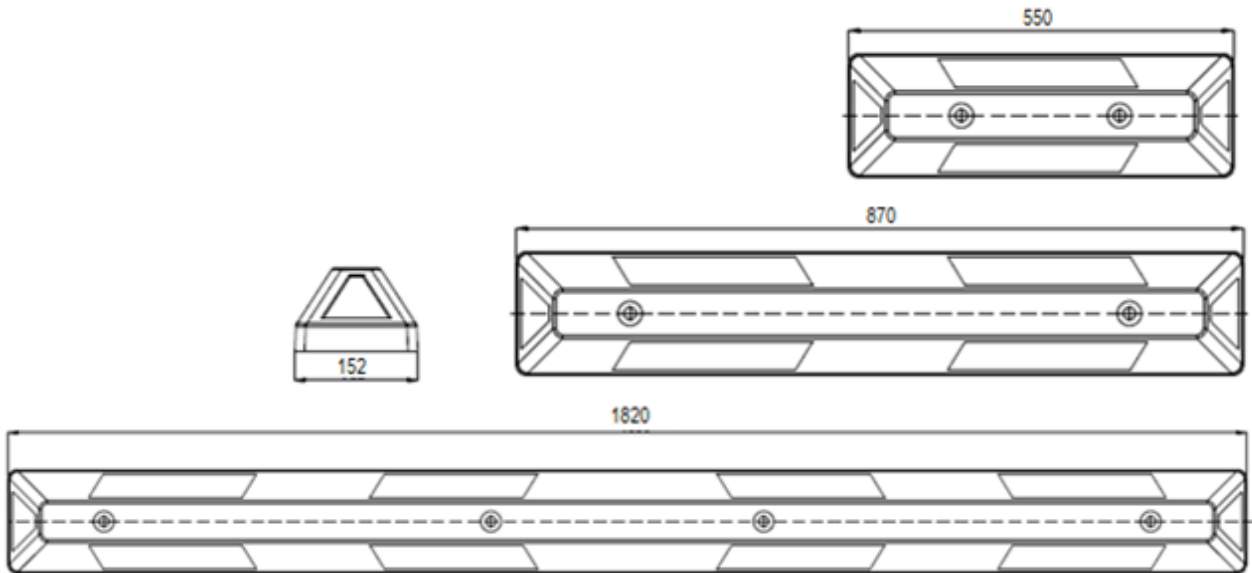

Packing:

Products packed on a Euro pallet in quantities depending on the size of the product:

55- 120 pcs / 90- 60 pcs / 180- 60 pcs. (pallet size 160x 110 cm)

Description on the pallet with the product name, quantity, batch number and packing date.

Other packaging is possible on request

Identification:

Product- on the underside of the product information about the date of production.

Pallet- product name, quantity, pallet identification number, packing date, quality control stamp.

Storage:

The products should be stored on pallets in protective film and protected from external weather conditions.

The products may be stored for a longer period of time only in closed, ventilated rooms without humidity, after removing the protective film. Storage temperature: max 40 °C

Health, safety and fire conditions:

Conditions for storage and use of the product- must meet all requirements for storage and use of rubber materials.