

„Quartet” Speed cushion

Purpose:

- Road safety element used when it is necessary to physically reduce the speed of motor vehicles

Place of production:

Geyer & Hosaja Sp. z o. o.
Partynia 12
39-310 Radomyśl Wielki

Material:

Vulcanised rubber
Reflective tape 3M

Set dimensions:

- l./ w./ h.
- 1800/ 3000/ 65 mm
 - 1800/ 2000/ 65 mm

Weight of the set:

- 280,0 kg
- 200,0 kg

Colour:

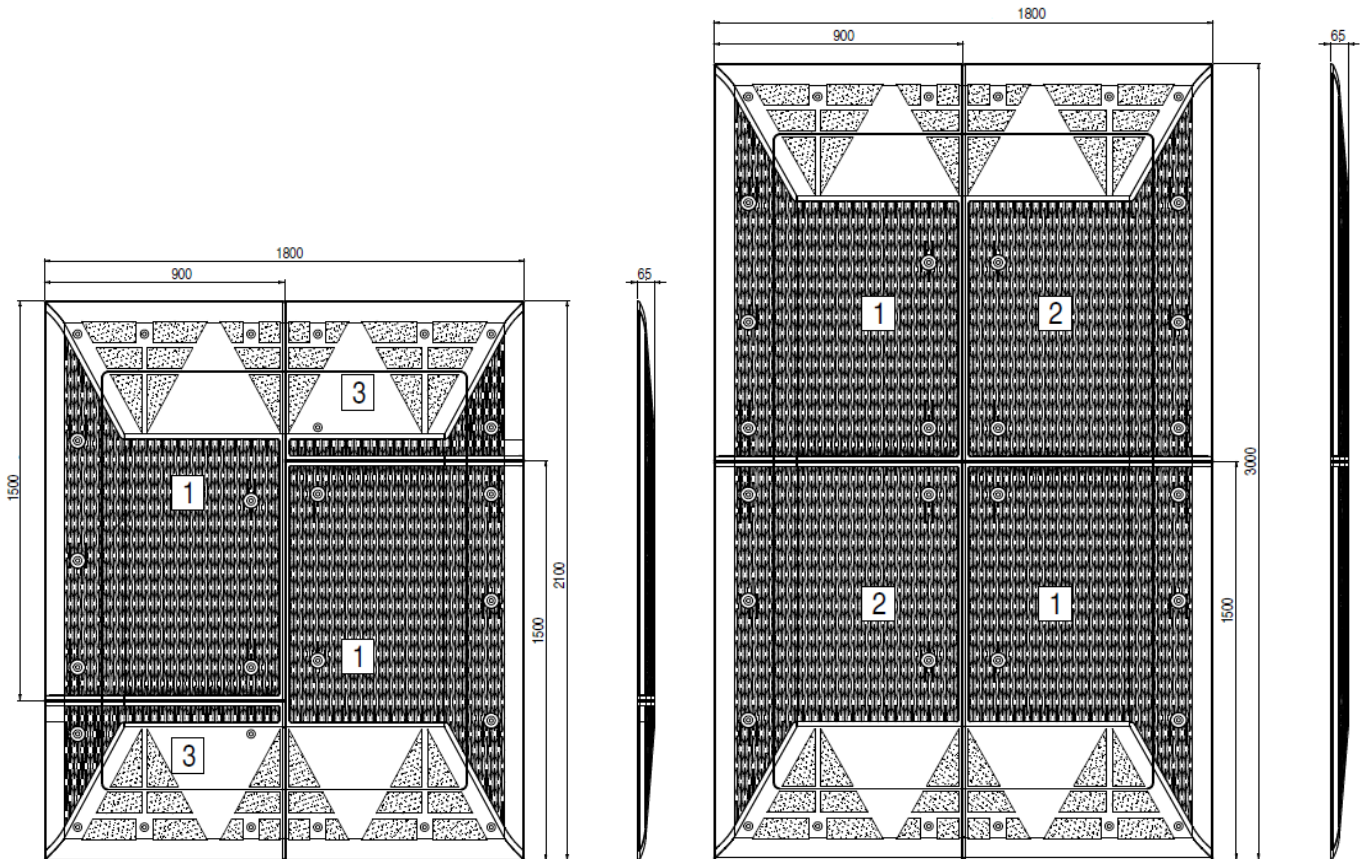
red/ black
white/yellow 3M reflective tape

Shape:

The "Quartet" speed cushions comes in two rectangular versions depending on the dimensions. The length measured along the road axis is 2000 or 3000 mm, width 1800 mm, height 65 mm. A white/yellow 3M reflective tape is affixed to the front/rear part of the overrun. It is available in black or red.

**Technical parameters:**

Parameters	Value	Unit	Standard / Method
Tensile strength	≥ 4,0	MPa	PN-ISO 37
Hardness	≥ 60	°ShA	PN-EN ISO 868:2005
Water absorption	≤ 2	%	PN-EN ISO 62
Tolerance - length, width	± 2	%	of nominal
Tolerance - height	± 4	%	of nominal
Tolerance- weight	± 2	%	of nominal

Technical drawings:**Packing:**

Products packed on a wooden pallet in quantity of 4 pcs. (one set)

Description on the pallet with the name of product, quantity, batch number and date of packing.

Other way of packing is possible on customer's request.

Identification:

Product- on the underside of the product information about the date of production.

Pallet- product name, quantity, pallet identification number, packing date, quality control stamp.

Storage:

The products should be stored on pallets in protective film and protected from external weather conditions.

The products may be stored for a longer period of time only in closed, ventilated rooms without humidity, after removing the protective film. Storage temperature: max 40 °C

Health, safety and fire conditions:

Conditions for storage and use of the product- must meet all requirements for storage and use of rubber materials.